


SERIES 720288 STAINLESS STEEL WAFER VALVE



Stainless steel ASTM A351 - CF8M, flanged ANSI 300 ball valve.

- Full port, sizes 1/2" to 8".
- Temperature to 366°F.
- Blow out proof stem, adjustable stem packing.
- P.T.F.E. seats, packing and thrust washer.
- Space saving design.
- 100% tested.
- TUV T.A. Luft approved.

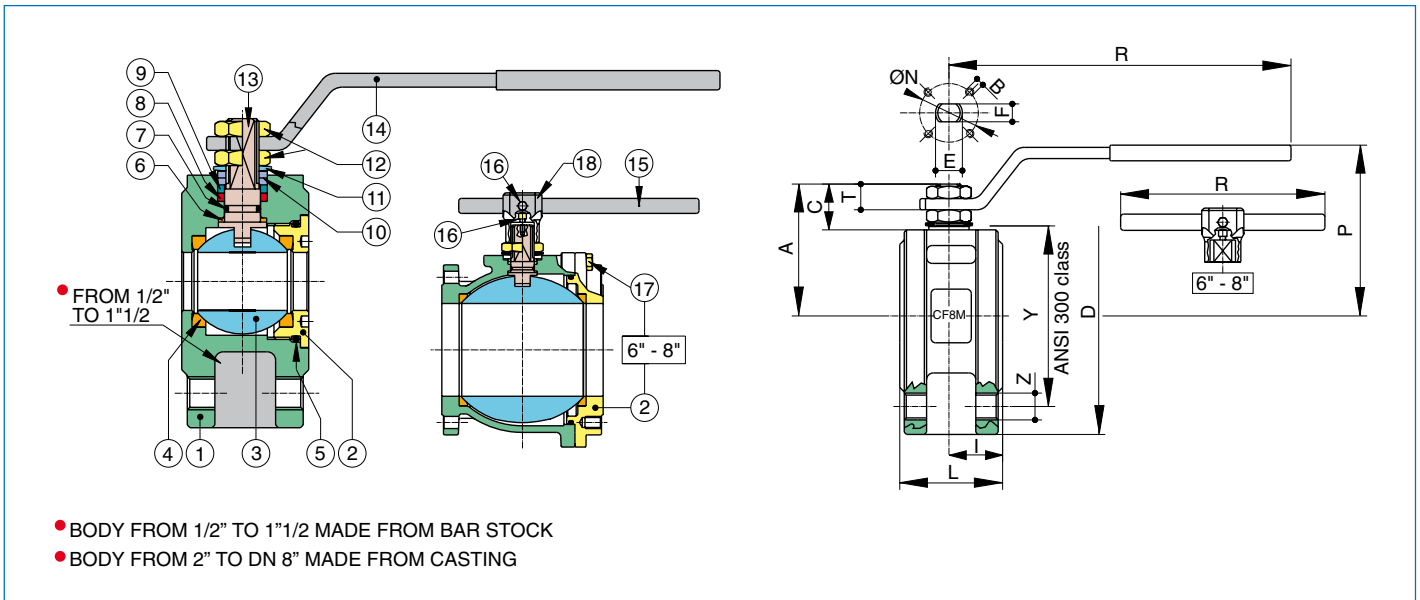

N Pos	PART NAME	MATERIAL	N PCS
1	BODY	AISI 316 - CF8M	1
2	END CONNECTION	AISI 316	1
3	BALL	AISI 316	1
4	BALL SEATS	P.T.F.E + 15% GLASS	2
5	RING	FKM (Viton®)	1
6	THRUST WASHER	P.T.F.E	1
7	RING	FKM (Viton®)	1
8	STEM SEAL	P.T.F.E	1
9	PACKING GLAND	STEEL	1
10	END STOP	AISI 430 (DN 10 - DN 50) STEEL (DN 65 - DN 200)	2 1
11	SPRING WASHER	STEEL	2
12	NUT	STEEL	2
13	STEM	AISI 316	1
14	HANDLE	STEEL	1
15	HANDLE DN 150-200	STEEL	1
16	SCREW	STEEL	2
17	SCREW	STEEL	8-12
18	BODY HANDLE DN150-200	CAST IRON	1

SIZE	D	Y	Z UNC	I	L	R	P	A	C	T	E	F	ØN	B	CV	Lbs
1/2"	3.75	2.62	4X1/2"	0.75	1.38	5.17	2.54	1.85	0.45	0.33	0.39	0.28	1.26	4XM5	16.30	3.10
3/4"	4.62	3.25	4X5/8"	0.78	1.57	5.17	2.71	2.03	0.37	0.33	0.39	0.28	1.26	4XM5	29.50	5.50
1"	4.88	3.50	4X5/8"	0.95	1.81	6.87	3.17	2.40	0.51	0.45	0.47	0.32	1.65	4XM5	43.00	6.80
1 1/4"	5.25	3.88	4X5/8"	1.10	2.12	6.87	3.33	2.54	0.65	0.45	0.47	0.32	1.65	4XM5	89.00	9.30
1 1/2"	6.12	4.50	4X3/4"	1.25	2.50	9.86	4.03	3.07	0.80	0.47	0.63	0.39	1.97	4XM6	230.00	15.00
2"	6.50	5.00	8X5/8"	1.61	3.23	9.86	4.43	3.43	0.63	0.47	0.63	0.39	1.97	4XM6	265.00	16.00
2 1/2"	7.50	5.88	8X3/4"	2.03	4.05	12.66	5.08	4.11	0.73	0.67	0.79	0.55	2.75	4XM8	540.00	26.00
3"	8.25	6.62	8X3/4"	2.40	4.80	12.66	5.45	4.53	0.83	0.71	0.79	0.55	2.75	4XM8	873.00	38.00
4"	10.00	7.88	8X3/4"	2.99	5.98	15.02	6.20	5.39	0.93	0.83	0.95	0.71	4.02	4XM10	1390.00	67.00
6"	12.50	10.62	12X3/4"	4.57	9.13	27.56	9.33	7.93	2.03	1.18	1.65	1.18	4.92	4XM12	2024.00	158.60
8"	15.74	13.00	12X7/8"	6.24	12.48	27.55	11.02	9.64	2.03	1.18	1.65	1.18	4.92	4XM12	2720.00	268.70